


Polymer Optical Fiber PMP Series

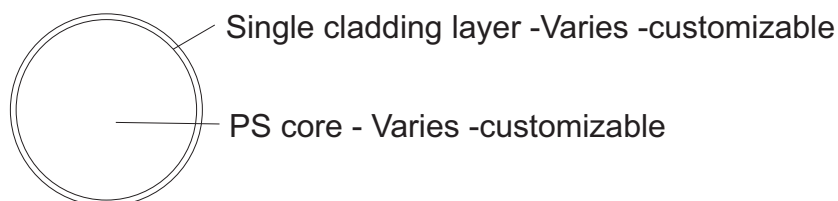

Core - Polystyrene (PS)	Refractive Index 1.59
Cladding - PMMA	Refractive Index 1.49
Core to clad ratio (ID/OD)	Varies -customizable
Numerical Aperture (NA)	0.54
Index Profile	Step Index
Max Temperature	70C
Custom OD's available - Yes, 25um -3000um	
Overclad available - Yes, please inquire	
Stock size available - Yes, please see website for most current list	
Best Transmission - red light	