


Polymer Optical Fiber SMP Series

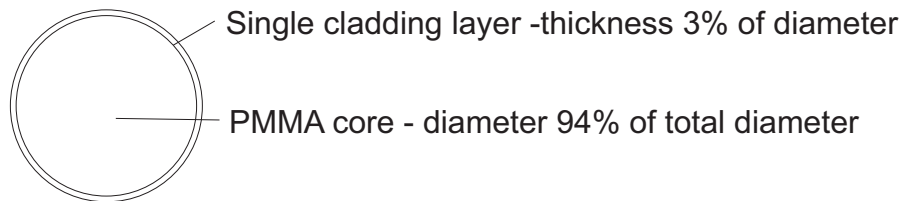

Core - Polymethyl Methacrylate (PMMA)	Refractive Index 1.49
Cladding - THV	Refractive Index 1.35
Core to clad ratio (ID/OD)	94%
Numerical Aperture (NA)	0.63
Index Profile	Step Index
Max Temperature	70C
Custom OD's available- Yes, 25um -3000um	
Overclad available - Yes, please inquire	
Stock size available - Yes, please see website for most current list	
Good all around transmission	